



Eureka Woodheating

Zero Clearance & Elevated Installation

ZERO CLEARANCE INSTALLATION

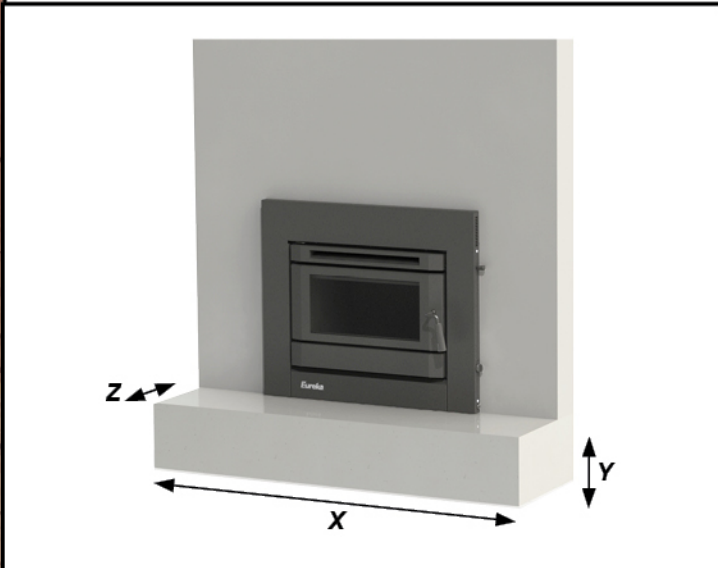

Non-combustible material on front face of framing

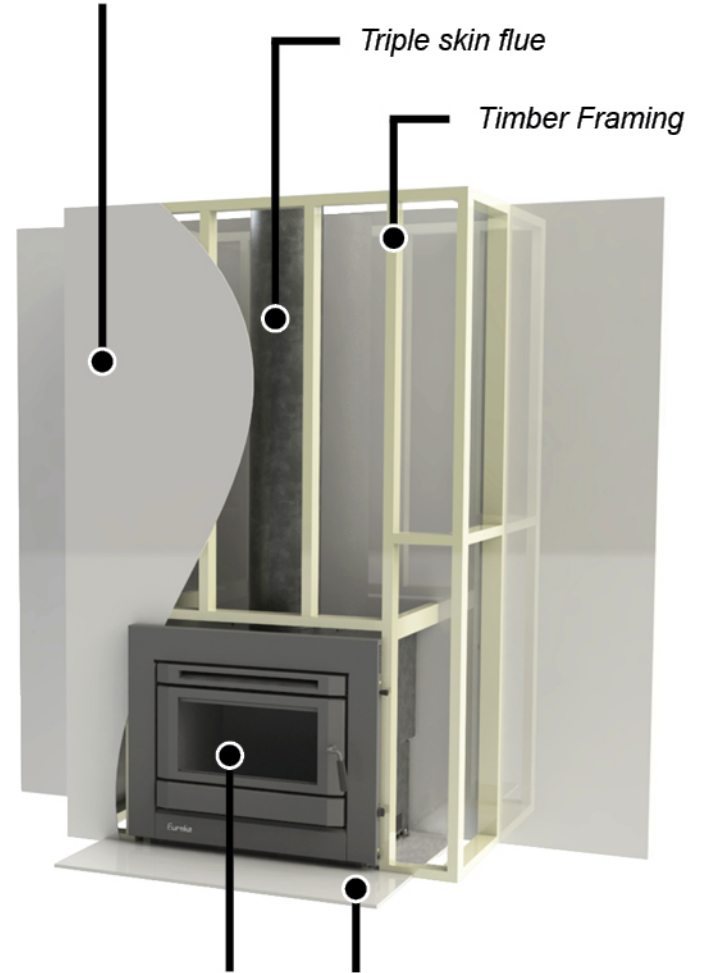

Eureka Insert woodheater of your choice
 Non-combustible hearth Must extend underneath Zero Clearance Cabinet

ELEVATED INSTALLATION

A minimum hearth depth of 300mm can be achieved by raising the woodheater. Use the following table for reference (raised step to be non-combustible):

	REF	OPAL		STOCKADE		GARNET		PEARL		RUBY	
HEARTH WIDTH	X	890mm (min.)		950mm (min.)		1280mm (min.)		945mm (min.)		1000mm (min.)	
HEARTH RAISED	Y	0mm	155mm (min.)	0mm	132mm (min.)	0mm	172mm (min.)	0mm	175mm (min.)	0mm	140mm (min.)
HEARTH DEPTH FROM FRONT OF FASCIA	Z	530mm (min.)	300mm (min.)	510mm (min.)	300mm (min.)	585mm (min.)	300mm (min.)	530mm (min.)	300mm (min.)	530mm (min.)	300mm (min.)